AIO® Wall Mounted (Gen 3)

Submittals



innova

AHRI CERTIFIED® www.ahridirectory.org
Unitary Small HP
AHRI Standard 210/240

Intertek

ENERGY STAR

CONTACT INFO

VIP Customer/Technical Support
Email: vip@innova.co
Phone: (212) 204-2700

DISCLAIMER

This documentation is intended for informational use only and should not be construed as a binding representation or contract. This documentation is provided “as is” without warranty of any kind, either express or implied. INNOVA and its affiliates disclaim all liability arising from the use or misuse of this documentation.

Illustrations may not be to scale, and all information and dimensions stated herein are subject to change at any time at the sole discretion of INNOVA. Benefits described herein apply only to the extent that the product is installed correctly in the correct application and used for its intended purpose.

INNOVA is constantly innovating and improving its products and reserves the right to modify product design and specifications without notice and without incurring any obligations.


CERTIFICATIONS & LISTINGS

The AHRI Certified® mark indicates INNOVA's participation in the AHRI Certification program. For verification of individual certified products, go to www.ahridirectory.org.

ETL Listed. Control Number: 5032306. Conforms to: UL 60335-2-40:2022 Ed.4 | CSA C22.2#60335-2-40:2022 Ed.4 | UL 60335-1:2016 Ed.6 | CSA C22.2#60335-1:2016 Ed.2

MODEL NUMBER NOMENCLATURE

Figure 1. AIO® nomenclature

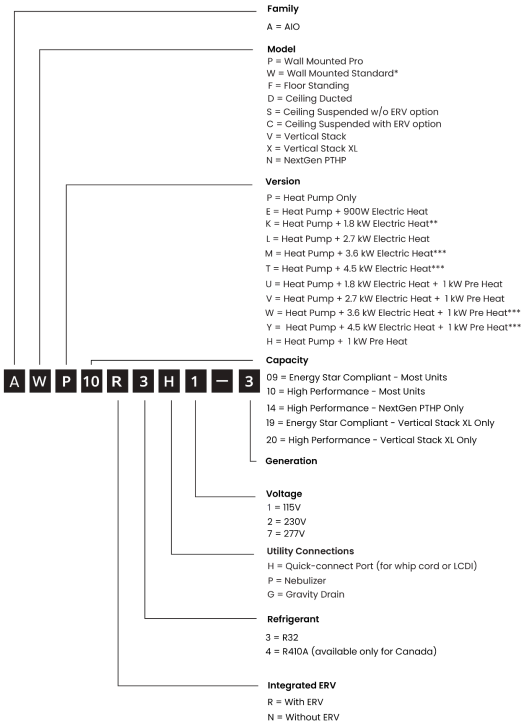

* 8” Vents : Just generation (e.g. = 3)

6” Vents : Generation + SP (e.g. = 3SP)

** Field convertible to 900W

*** AIO® Vertical Stack XL **Only**

AIO® is a registered trademark of INNOVA.
Copyright © 2026 INNOVA. All rights reserved.

CONTENTS

1. SUBMITTAL SHEETS.....4

1.1 115V Heat pump only - High Performance.....5

1.2 115V Heat pump + electric heat - High Performance.....6

1.3 230V Heat pump only - High Performance.....7

1.4 230V Heat pump + electric heat - High Performance.....8

1.5 115V Heat pump only - Energy Star Compliant...9

1.6 115V Heat pump + electric heat - Energy Star Compliant.....10

1.7 230V Heat pump only - Energy Star Compliant 11

1.8 230V Heat pump + electric heat - Energy Star Compliant.....12

1. SUBMITTAL SHEETS

Select the correct submittal sheet from the following pages and use it during and after installation.

1. Identify the unit/s by model number and features.
2. Use the performance data and electrical specifications for reference.
3. Fill in the required project details at the top of the submittal sheet.
4. Check any boxes for control options and Field-installed accessories to be included with the unit.
5. Submit the sheet to the installation project manager or building manager.

1.1 115V Heat pump only - High Performance

AIO® WALL MOUNTED -115V - NO ELECTRIC HEAT STRIP - R32 -SUBMITTAL (AWP10N3H1)

Job	Reference	Construction
Location	Approval	Quote Number
Engineer	Date	Drawing Number
Submitted To	Submitted By:	P.O. Number:


General Features

- BLDC inverter compressor
- ECM fans
- R32 Refrigerant
- Auto restart
- Intelligent defrost
- No outdoor unit
- Condensate disbursement systems
- Onboard touch controller
- Optional add-on ERV
- Washable filter
- Electronically controlled air louver
- Compact, slim design
- 3 selectable fan speeds + Auto
- 10-Year limited warranty (after certification)
- Made in Italy

The installing contractor must contact INNOVA Customer Technical Support prior to installation to schedule an installation training overview.

This may be conducted in person or remotely (online). It is the official installation training and may include videos, best practices, and system requirements.

Performing installations without training may result in installation errors, performance issues, and possible warranty limitations.

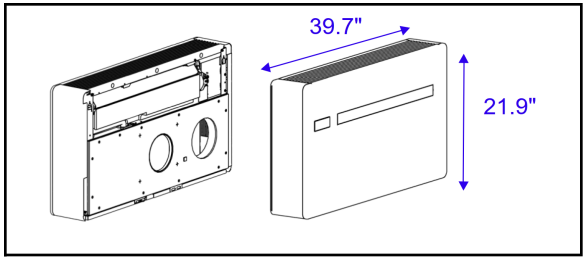

Performance Specifications			
Cooling	Min-Max	BTU/H	3,300 - 10,200
	Rated capacity (95°F [35°C])		7,400
	Efficiency	EER2	9.2
Heating	Min-Max	BTU/H	3,000 - 10,100
	Rated capacity (47°F [8.3°C])		7,400
	Rated capacity (5°F [-15°C])		5,300
	Efficiency	COP	3.1
Sound	Indoor	db(A)	27 - 41
	Outdoor		28 - 52
Moisture removal		Pts/h	1.9
		L/hr	0.9
Airflow	Indoor	CFM	175 - 270
		m^3/hr	300 - 450
	Outdoor	CFM	235 - 325
		m^3/hr	400 - 550

Electric Specifications	
Power Supply (V/Ph/Hz)	115V/1Ph/60Hz
Voltage Range	103 - 127
Running Amps Cooling	5.7
Running Amps Heating	5.1
MCA	12
Maximum Overcurrent Protection (A)	25
Max Power Input (amps) Cooling	9.6
Max Power Input (amps) Heating	9.6

Included	Wall Controllers + Gateways	
☐	Wireless Remote	WRCH20
☐	Basic Touch Controller	LTCH20
☐	Recessed Touch Controller	RTCH20
☐	Advanced TFT Controller with 7-Day program	TFTH20
☐	Wireless (AA Battery) Infrared Controller with 7-Day program	WIPT20
☐	Third Party Gateway	TPG015
☐	WiFi App	WIFI30
☐	E-Paper EOS Controller	EEOS12
☐	Simple EOS Controller	SEOS12
☐	Integration gateway for LTCH20, TFTH20 and MODBUS	GWN
☐	Integration gateway for LTCH20, TFTH20, MODBUS, BACnet, and third-party thermostats	GWX

Included	General Accessories	
☐	ERV	AWERV30
☐	Underbody Cover Plate	GB073711
☐	Underbody Cover Plate for unit w/ERV	GB073714
☐	Reducer Plate from 8" (203.2 mm) to 6" (152.4 mm)	RED2016

Included	LCDI Power Cords	Amps	NEMA	SKU
☐	89 in. (2260.6 mm)	20	5-20P	L129A

1.2 115V Heat pump + electric heat - High Performance

AIO® WALL MOUNTED -115V - 900W ELECTRIC HEAT STRIP - R32 -SUBMITTAL (AWE10N3H1)

Job	Reference	Construction
Location	Approval	Quote Number
Engineer	Date	Drawing Number
Submitted To	Submitted By:	P.O. Number:


General Features

- BLDC inverter compressor
- ECM fans
- R32 Refrigerant
- Field configured 900W Electric heat supplement
- Auto restart
- Intelligent defrost
- No outdoor unit
- Condensate disbursement systems
- Onboard touch controller
- Optional add-on ERV
- Washable filter
- Electronically controlled air louver
- Compact, slim design
- 3 selectable fan speeds + Auto
- 10-Year limited warranty (after certification)
- Made in Italy

The installing contractor must contact INNOVA Customer Technical Support prior to installation to schedule an installation training overview.

This may be conducted in person or remotely (online). It is the official installation training and may include videos, best practices, and system requirements.

Performing installations without training may result in installation errors, performance issues, and possible warranty limitations.

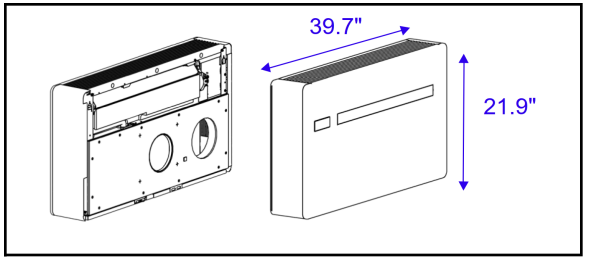

Performance Specifications			
Cooling	Min-Max	BTU/H	3,300 - 10,200
	Rated capacity (95°F [35°C])		7,400
	Efficiency	EER2	9.2
Heating	Min-Max	BTU/H	3,000 - 10,100
	Rated capacity (47°F [8.3°C])		7,400
	Rated capacity (5°F [-15°C])		5,300
	Efficiency	COP	3.1
Sound	Indoor	db(A)	27 - 41
	Outdoor		28 - 52
Moisture removal		Pts/h	1.9
		L/hr	0.9
Airflow	Indoor	CFM	175 - 270
		m^3/hr	300 - 450
	Outdoor	CFM	235 - 325
		m^3/hr	400 - 550

Electric Specifications	
Power Supply (V/Ph/Hz)	115V/1Ph/60Hz
Voltage Range	103 - 127
Running Amps Cooling	5.7
Running Amps Heating	5.1

MCA	22
Maximum Overcurrent Protection (A)	30
Max Power Input (amps) Cooling	9.6
Max Power Input (amps) Heating	17.4

Included	Wall Controllers + Gateways	
☐	Wireless Remote	WRCH20
☐	Basic Touch Controller	LTCH20
☐	Recessed Touch Controller	RTCH20
☐	Advanced TFT Controller with 7-Day program	TFTH20
☐	Wireless (AA Battery) Infrared Controller with 7-Day program	WIPT20
☐	Third Party Gateway	TPG015
☐	WiFi App	WIFI30
☐	E-Paper EOS Controller	EEOS12
☐	Simple EOS Controller	SEOS12
☐	Integration gateway for LTCH20, TFTH20 and MODBUS	GWN
☐	Integration gateway for LTCH20, TFTH20, MODBUS, BACnet, and third-party thermostats	GWX

Included	General Accessories	
☐	ERV	AWERV30
☐	Underbody Cover Plate	GB073711
☐	Underbody Cover Plate for unit w/ERV	GB073714
☐	Reducer Plate from 8" (203.2 mm) to 6" (152.4 mm)	RED2016

Included	LCDI Power Cords	Electric Heat	NEMA	SKU
☐	LCDI is not available over 20A for 115V units			

1.3 230V Heat pump only - High Performance

AIO® WALL MOUNTED - 230V - NO ELECTRIC HEAT STRIP - R32 -SUBMITTAL (AWP10N3H2)

Job	Reference	Construction
Location	Approval	Quote Number
Engineer	Date	Drawing Number
Submitted To	Submitted By:	P.O. Number:


General Features

- BLDC inverter compressor
- ECM fans
- R32 Refrigerant
- Auto restart
- Intelligent defrost
- No outdoor unit
- Condensate disbursement systems
- Onboard touch controller
- Optional add-on ERV
- Washable filter
- Electronically controlled air louver
- Compact, slim design
- 3 selectable fan speeds + Auto
- 10-Year limited warranty (after certification)
- Made in Italy

The installing contractor must contact INNOVA Customer Technical Support prior to installation to schedule an installation training overview.

This may be conducted in person or remotely (online). It is the official installation training and may include videos, best practices, and system requirements.

Performing installations without training may result in installation errors, performance issues, and possible warranty limitations.

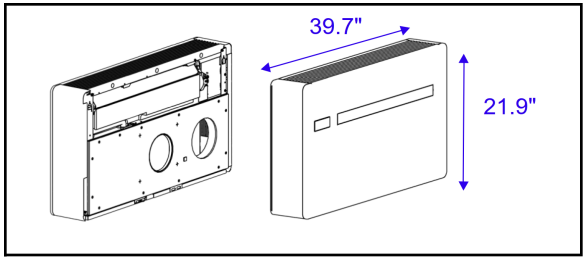

Performance Specifications			
Cooling	Min-Max	BTU/H	3,300 - 10,200
	Rated capacity (95°F [35°C])		7,400
	Efficiency	EER2	9.2
Heating	Min-Max	BTU/H	3,000 - 10,100
	Rated capacity (47°F [8.3°C])		7,400
	Rated capacity (5°F [-15°C])		5,300
	Efficiency	COP	3.1
Sound	Indoor	db(A)	27 - 41
	Outdoor		28 - 52
Moisture removal		Pts/h	1.9
		L/hr	0.9
Airflow	Indoor	CFM	175 - 270
		m^3/hr	300 - 450
	Outdoor	CFM	235 - 325
		m^3/hr	400 - 550

Electric Specifications	
Power Supply (V/Ph/Hz)	230V/1Ph/60Hz
Voltage Range	180-253
Running Amps Cooling	2.9
Running Amps Heating	2.6
MCA	6
Maximum Overcurrent Protection (A)	15
Max Power Input (amps) Cooling	4.8
Max Power Input (amps) Heating	4.8

Included	Wall Controllers + Gateways	
☐	Wireless Remote	WRCH20
☐	Basic Touch Controller	LTCH20
☐	Recessed Touch Controller	RTCH20
☐	Advanced TFT Controller with 7-Day program	TFTH20
☐	Wireless (AA Battery) Infrared Controller with 7-Day program	WIPT20
☐	Third Party Gateway	TPG015
☐	WiFi App	WIFI30
☐	E-Paper EOS Controller	EEOS12
☐	Simple EOS Controller	SEOS12
☐	Integration gateway for LTCH20, TFTH20 and MODBUS	GWN
☐	Integration gateway for LTCH20, TFTH20, MODBUS, BACnet, and third-party thermostats	GWX

Included	General Accessories	
☐	ERV	AWERV30
☐	Underbody Cover Plate	GB0737II
☐	Underbody Cover Plate for unit w/ERV	GB0737I4
☐	Reducer Plate from 8" (203.2 mm) to 6" (152.4 mm)	RED2016

Included	LCDI Power Cords	Amps	NEMA	SKU
☐	89 in. (2260.6 mm)	15	6-15P	L259A

1.4 230V Heat pump + electric heat - High Performance

AIO® WALL MOUNTED - 230V - 900W/1800W ELECTRIC HEAT - R32 -SUBMITTAL (AWK10N3H2)

Job	Reference	Construction
Location	Approval	Quote Number
Engineer	Date	Drawing Number
Submitted To	Submitted By:	P.O. Number:


General Features

- BLDC inverter compressor
- ECM fans
- R32 Refrigerant
- Field configured 1,800W Electric heat supplement, Staged as 900W + 900W
- Auto restart
- Intelligent defrost
- No outdoor unit
- Condensate disbursement systems
- Onboard touch controller
- Optional add-on ERV
- Washable filter
- Electronically controlled air louver
- Compact, slim design
- 3 selectable fan speeds + Auto
- 10-Year limited warranty (after certification)
- Made in Italy

The installing contractor must contact INNOVA Customer Technical Support prior to installation to schedule an installation training overview.

This may be conducted in person or remotely (online). It is the official installation training and may include videos, best practices, and system requirements.

Performing installations without training may result in installation errors, performance issues, and possible warranty limitations.

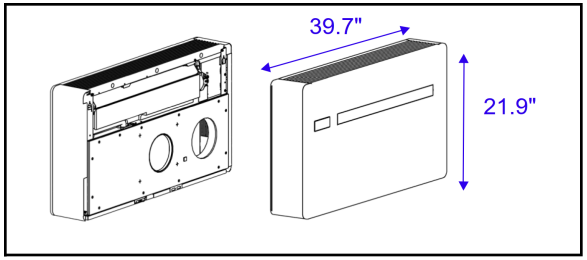

Performance Specifications			900W/1,800W
Cooling	Min-Max	BTU/H	3,300 - 10,200
	Rated capacity (95°F [35°C])		7,400
	Efficiency	EER2	9.2
Heating	Min-Max	BTU/H	3,000 - 10,100
	Rated capacity (47°F [8.3°C])		7,400
	Rated capacity (5°F [-15°C])		5,300
	Efficiency	COP	3.1
Sound	Indoor	db(A)	27 - 41
	Outdoor		28 - 52
Moisture removal		Pts/h	1.9
		L/hr	0.9
Airflow	Indoor	CFM	175 - 270
		m^3/hr	300 - 450
	Outdoor	CFM	235 - 325
		m^3/hr	400 - 550

Electric Specifications	900W	1,800W
Electric Specifications	230V/1Ph/60Hz	230V/1Ph/60Hz
Voltage Range	180-253	180-253
Running Amps Cooling	2.9	2.9
Running Amps Heating	2.6	2.6

MCA	14	20
Maximum Overcurrent Protection (A)	15	30
Max Power Input (amps) Cooling	4.8	4.8
Max Power Input (amps) Heating	8.7	12.6

Included	Wall Controllers + Gateways	
☐	Wireless Remote	WRCH20
☐	Basic Touch Controller	LTCH20
☐	Recessed Touch Controller	RTCH20
☐	Advanced TFT Controller with 7-Day program	TFTH20
☐	Wireless (AA Battery) Infrared Controller with 7-Day program	WIPT20
☐	Third Party Gateway	TPG015
☐	WiFi App	WIFI30
☐	E-Paper EOS Controller	EEOS12
☐	Simple EOS Controller	SEOS12
☐	Integration gateway for LTCH20, TFTH20 and MODBUS	GWN
☐	Integration gateway for LTCH20, TFTH20, MODBUS, BACnet, and third-party thermostats	GWX

Included	General Accessories	
☐	ERV	AWERV30
☐	Underbody Cover Plate	GB0737II
☐	Underbody Cover Plate for unit w/ERV	GB0737I4
☐	Reducer Plate from 8" (203.2 mm) to 6" (152.4 mm)	RED2016

Included	LCDI Power Cords	Amps	NEMA	SKU
☐	89 in. (2260.6 mm)	20	6-20P	L229A

1.5 115V Heat pump only - Energy Star Compliant

AIO® WALL MOUNTED -115V - NO ELECTRIC HEAT STRIP - R32 -SUBMITTAL (AWP09N3H1)

Job	Reference	Construction
Location	Approval	Quote Number
Engineer	Date	Drawing Number
Submitted To	Submitted By:	P.O. Number:

General Features


- BLDC inverter compressor
- ECM fans
- R32 Refrigerant
- Auto restart
- Intelligent defrost
- No outdoor unit
- Condensate disbursement systems
- Onboard touch controller
- Optional add-on ERV
- Washable filter
- Electronically controlled air louver
- Compact, slim design
- 3 selectable fan speeds + Auto
- 10-Year limited warranty (after certification)
- Made in Italy



The installing contractor must contact INNOVA Customer Technical Support prior to installation to schedule an installation training overview.

This may be conducted in person or remotely (online). It is the official installation training and may include videos, best practices, and system requirements.

Performing installations without training may result in installation errors, performance issues, and possible warranty limitations.

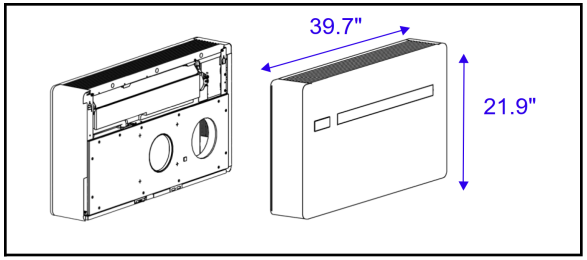

Performance Specifications			
Cooling	Min-Max	BTU/H	3,300 - 10,200
	Rated capacity (95°F [35°C])		6,700
	Efficiency	EER2	10.45
Heating	Min-Max	BTU/H	3,000 - 10,100
	Rated capacity (47°F [8.3°C])		6,700
	Rated capacity (5°F [-15°C])		4,500
	Efficiency	COP	3.33
Sound	Indoor	db(A)	27 - 41
	Outdoor		28 - 52
Moisture removal		Pts/h	1.9
		L/hr	0.9
Airflow	Indoor	CFM	175 - 270
		m^3/hr	300 - 450
	Outdoor	CFM	235 - 325
		m^3/hr	400 - 550

Electric Specifications	
Power Supply (V/Ph/Hz)	115V/1Ph/60Hz
Voltage Range	103 - 127
Running Amps Cooling	5.7
Running Amps Heating	5.1

MCA	12
Maximum Overcurrent Protection (A)	25
Max Power Input (amps) Cooling	9.6
Max Power Input (amps) Heating	9.6

Included	Wall Controllers + Gateways	
☐	Wireless Remote	WRCH20
☐	Basic Touch Controller	LTCH20
☐	Recessed Touch Controller	RTCH20
☐	Advanced TFT Controller with 7-Day program	TFTH20
☐	Wireless (AA Battery) Infrared Controller with 7-Day program	WIPT20
☐	Third Party Gateway	TPG015
☐	WiFi App	WIFI30
☐	E-Paper EOS Controller	EEOS12
☐	Simple EOS Controller	SEOS12
☐	Integration gateway for LTCH20, TFTH20 and MODBUS	GWN
☐	Integration gateway for LTCH20, TFTH20, MODBUS, BACnet, and third-party thermostats	GWX

Included	General Accessories	
☐	ERV	AWERV30
☐	Underbody Cover Plate	GB0737II
☐	Underbody Cover Plate for unit w/ERV	GB0737I4
☐	Reducer Plate from 8" (203.2 mm) to 6" (152.4 mm)	RED2016

Included	LCDI Power Cords	Amps	NEMA	SKU
☐	89 in. (2260.6 mm)	15	5-15P	L159A

1.6 115V Heat pump + electric heat - Energy Star Compliant

AIO® WALL MOUNTED -115V - 900W ELECTRIC HEAT STRIP - R32 -SUBMITTAL (AWE09N3H1)

Job	Reference	Construction
Location	Approval	Quote Number
Engineer	Date	Drawing Number
Submitted To	Submitted By:	P.O. Number:


General Features

- BLDC inverter compressor
- ECM fans
- R32 Refrigerant
- Field configured 900W Electric heat supplement
- Auto restart
- Intelligent defrost
- No outdoor unit
- Condensate disbursement systems
- Onboard touch controller
- Optional add-on ERV
- Washable filter
- Electronically controlled air louver
- Compact, slim design
- 3 selectable fan speeds + Auto
- 10-Year limited warranty (after certification)
- Made in Italy

The installing contractor must contact INNOVA Customer Technical Support prior to installation to schedule an installation training overview.

This may be conducted in person or remotely (online). It is the official installation training and may include videos, best practices, and system requirements.

Performing installations without training may result in installation errors, performance issues, and possible warranty limitations.

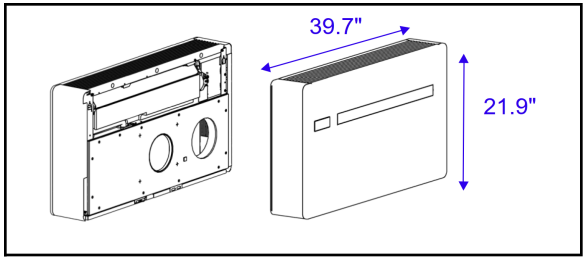

Performance Specifications			
Cooling	Min-Max	BTU/H	3,300 - 10,200
	Rated capacity (95°F [35°C])		6,700
	Efficiency	EER2	10.45
Heating	Min-Max	BTU/H	3,000 - 10,100
	Rated capacity (47°F [8.3°C])		6,700
	Rated capacity (5°F [-15°C])		4,500
	Efficiency	COP	3.33
Sound	Indoor	db(A)	27 - 41
	Outdoor		28 - 52
Moisture removal		Pts/h	1.9
		L/hr	0.9
Airflow	Indoor	CFM	175 - 270
		m^3/hr	300 - 450
	Outdoor	CFM	235 - 325
		m^3/hr	400 - 550

Electric Specifications	
Power Supply (V/Ph/Hz)	115V/1Ph/60Hz
Voltage Range	103 - 127
Running Amps Cooling	5.7
Running Amps Heating	5.1

MCA	22
Maximum Overcurrent Protection (A)	30
Max Power Input (amps) Cooling	9.6
Max Power Input (amps) Heating	17.4

Included	Wall Controllers + Gateways	
☐	Wireless Remote	WRCH20
☐	Basic Touch Controller	LTCH20
☐	Recessed Touch Controller	RTCH20
☐	Advanced TFT Controller with 7-Day program	TFTH20
☐	Wireless (AA Battery) Infrared Controller with 7-Day program	WIPT20
☐	Third Party Gateway	TPG015
☐	WiFi App	WIFI30
☐	E-Paper EOS Controller	EEOS12
☐	Simple EOS Controller	SEOS12
☐	Integration gateway for LTCH20, TFTH20 and MODBUS	GWN
☐	Integration gateway for LTCH20, TFTH20, MODBUS, BACnet, and third-party thermostats	GWX

Included	General Accessories	
☐	ERV	AWERV30
☐	Underbody Cover Plate	GB0737II
☐	Underbody Cover Plate for unit w/ERV	GB0737I4
☐	Reducer Plate from 8" (203.2 mm) to 6" (152.4 mm)	RED2016

Included	LCDI Power Cords	Amps	NEMA	SKU
☐	89 in. (2260.6 mm)	20	5-20P	L129A

1.7 230V Heat pump only - Energy Star Compliant

AIO® WALL MOUNTED - 230V - NO ELECTRIC HEAT STRIP - R32 -SUBMITTAL (AWP09N3H2)

Job	Reference	Construction
Location	Approval	Quote Number
Engineer	Date	Drawing Number
Submitted To	Submitted By:	P.O. Number:


General Features

- BLDC inverter compressor
- ECM fans
- R32 Refrigerant
- Auto restart
- Intelligent defrost
- No outdoor unit
- Condensate disbursement systems
- Onboard touch controller
- Optional add-on ERV
- Washable filter
- Electronically controlled air louver
- Compact, slim design
- 3 selectable fan speeds + Auto
- 10-Year limited warranty (after certification)
- Made in Italy

The installing contractor must contact INNOVA Customer Technical Support prior to installation to schedule an installation training overview.

This may be conducted in person or remotely (online). It is the official installation training and may include videos, best practices, and system requirements.

Performing installations without training may result in installation errors, performance issues, and possible warranty limitations.

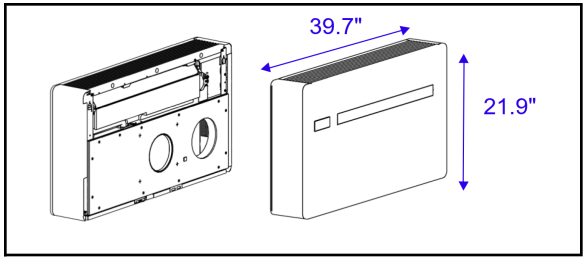

Performance Specifications			
Cooling	Min-Max	BTU/H	3,300 - 10,200
	Rated capacity (95°F [35°C])		6,700
	Efficiency	EER2	10.45
Heating	Min-Max	BTU/H	3,000 - 10,100
	Rated capacity (47°F [8.3°C])		6,700
	Rated capacity (5°F [-15°C])		4,500
	Efficiency	COP	3.33
Sound	Indoor	db(A)	27 - 41
	Outdoor		28 - 52
Moisture removal		Pts/h	1.9
		L/hr	0.9
Airflow	Indoor	CFM	175 - 270
		m^3/hr	300 - 450
	Outdoor	CFM	235 - 325
		m^3/hr	400 - 550

Electric Specifications	
Power Supply (V/Ph/Hz)	230V/1Ph/60Hz
Voltage Range	180-253
Running Amps Cooling	2.9
Running Amps Heating	2.6
MCA	6
Maximum Overcurrent Protection (A)	15
Max Power Input (amps) Cooling	4.8
Max Power Input (amps) Heating	4.8

Included	Wall Controllers + Gateways	
☐	Wireless Remote	WRCH20
☐	Basic Touch Controller	LTCH20
☐	Recessed Touch Controller	RTCH20
☐	Advanced TFT Controller with 7-Day program	TFTH20
☐	Wireless (AA Battery) Infrared Controller with 7-Day program	WIPT20
☐	Third Party Gateway	TPG015
☐	WiFi App	WIFI30
☐	E-Paper EOS Controller	EEOS12
☐	Simple EOS Controller	SEOS12
☐	Integration gateway for LTCH20, TFTH20 and MODBUS	GWN
☐	Integration gateway for LTCH20, TFTH20, MODBUS, BACnet, and third-party thermostats	GWX

Included	General Accessories	
☐	ERV	AWERV30
☐	Underbody Cover Plate	GB0737II
☐	Underbody Cover Plate for unit w/ERV	GB0737I4
☐	Reducer Plate from 8" (203.2 mm) to 6" (152.4 mm)	RED2016

Included	LCDI Power Cords	Amps	NEMA	SKU
☐	89 in. (2260.6 mm)	15	6-15P	L259A

1.8 230V Heat pump + electric heat - Energy Star Compliant

AIO® WALL MOUNTED - 230V - 900W/1800W ELECTRIC HEAT - R32 -SUBMITTAL (AWK09N3H2)

Job	Reference	Construction
Location	Approval	Quote Number
Engineer	Date	Drawing Number
Submitted To	Submitted By:	P.O. Number:


General Features

- BLDC inverter compressor
- ECM fans
- R32 Refrigerant
- Field configured 1,800W Electric heat supplement, Staged as 900W + 900W
- Auto restart
- Intelligent defrost
- No outdoor unit
- Condensate disbursement systems
- Onboard touch controller
- Optional add-on ERV
- Washable filter
- Electronically controlled air louver
- Compact, slim design
- 3 selectable fan speeds + Auto
- 10-Year limited warranty (after certification)
- Made in Italy

The installing contractor must contact INNOVA Customer Technical Support prior to installation to schedule an installation training overview.

This may be conducted in person or remotely (online). It is the official installation training and may include videos, best practices, and system requirements.

Performing installations without training may result in installation errors, performance issues, and possible warranty limitations.

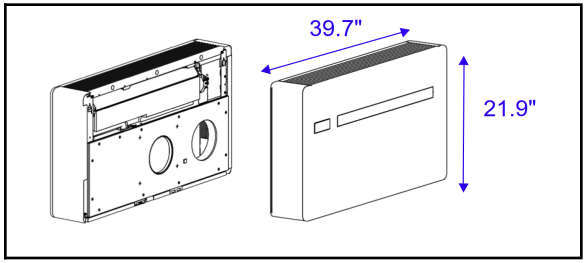

Performance Specifications			900W/1,800W
Cooling	Min-Max	BTU/H	3,300 - 10,200
	Rated capacity (95°F [35°C])		6,700
	Efficiency	EER2	10.45
Heating	Min-Max	BTU/H	3,000 - 10,100
	Rated capacity (47°F [8.3°C])		6,700
	Rated capacity (5°F [-15°C])		4,500
	Efficiency	COP	3.33
Sound	Indoor	db(A)	27 - 41
	Outdoor		28 - 52
Moisture removal		Pts/h	1.9
		L/hr	0.9
Airflow	Indoor	CFM	175 - 270
		m^3/hr	300 - 450
	Outdoor	CFM	235 - 325
		m^3/hr	400 - 550

Electric Specifications	900W	1,800W
Electric Specifications	230V/1Ph/60Hz	230V/1Ph/60Hz

Voltage Range	180-253	180-253
Running Amps Cooling	2.9	2.9
Running Amps Heating	2.6	2.6
MCA	14	20
Maximum Overcurrent Protection (A)	15	30
Max Power Input (amps) Cooling	4.8	4.8
Max Power Input (amps) Heating	8.7	12.6

Included	Wall Controllers + Gateways	
☐	Wireless Remote	WRCH20
☐	Basic Touch Controller	LTCH20
☐	Recessed Touch Controller	RTCH20
☐	Advanced TFT Controller with 7-Day program	TFTH20
☐	Wireless (AA Battery) Infrared Controller with 7-Day program	WIPT20
☐	Third Party Gateway	TPG015
☐	WiFi App	WIFI30
☐	E-Paper EOS Controller	EEOS12
☐	Simple EOS Controller	SEOS12
☐	Integration gateway for LTCH20, TFTH20 and MODBUS	GWN
☐	Integration gateway for LTCH20, TFTH20, MODBUS, BACnet, and third-party thermostats	GWX

Included	General Accessories	
☐	ERV	AWERV30
☐	Underbody Cover Plate	GB0737II
☐	Underbody Cover Plate for unit w/ERV	GB0737I4
☐	Reducer Plate from 8” (203.2 mm) to 6” (152.4 mm)	RED2016

Included	LCDI Power Cords	Amps	NEMA	SKU
☐	89 in. (2260.6 mm)	20	6-20P	L229A

With over 20 years of experience in the climate comfort sector, we have a clear goal: growth through innovation. Our team is laser-focused on the conception, development, and production of innovative heating, ventilation, and air conditioning solutions. This mission has developed through bringing together technical skills, creativity, technology, design, Italian passion, and a global vision to achieve the best energy efficiency and performance.

innova.co | **USA:** 216-710-1000 **Canada:** 416-739-1000

MADE IN ITALY

© 2026 INNOVA. All rights reserved.

Revised August 19, 2026

AIO® Wall Mounted (Gen 3) **Product Data Sheet**