
SUNVENT LLA LOUVERS

MODEL “LLA/C-E” with 4” deep frame, concealed 1” Flange and 2 Connections on Right Side

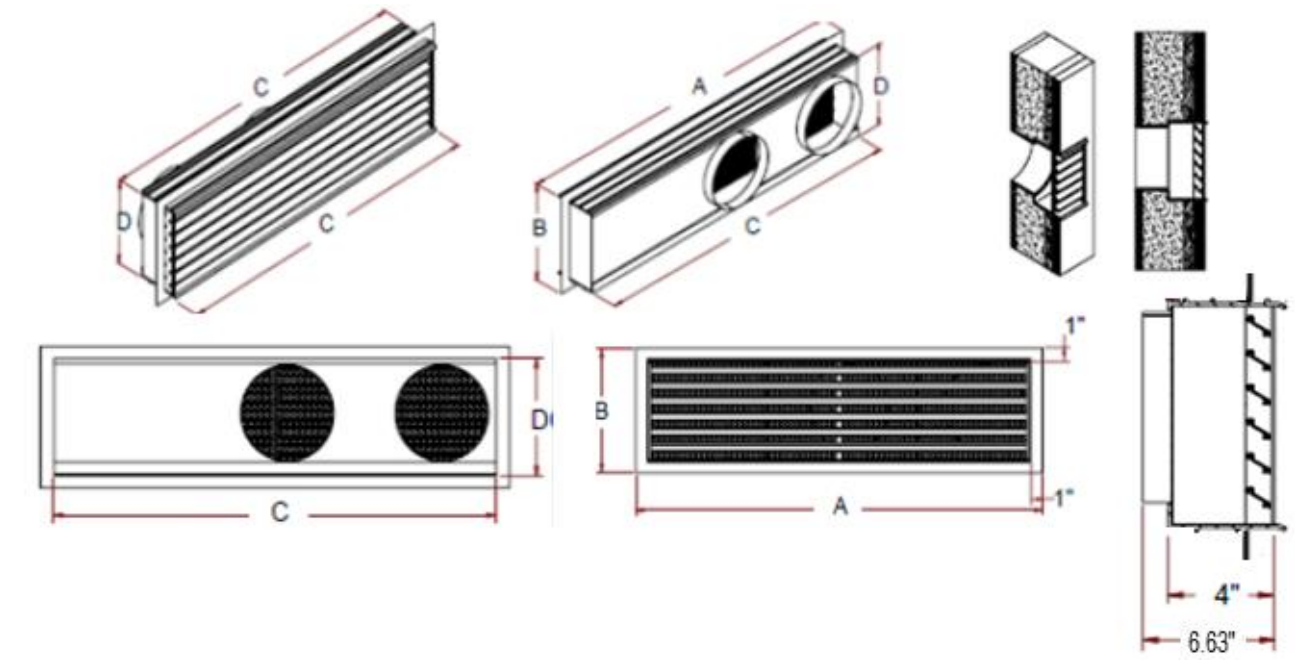

* Placement from front face

AIO Model	Collar	LLA Model	A	B	C	D	Opening Required	Centers	Qty	Flange*
Wall	7	LLA/C-E 7W	34.93	10.38	32.93	8.5	33.18”W x 8.75”H	11.53		
Wall	8	LLA/C-E 8W	35.93	11.38	33.93	9.5	34.18”W x 9.75”H	11.53		
Wall Pro	9	LLA/C-E 9W	36.93	12.38	34.93	10.5	35.18”W x 10.75”H	11.53		
Ceiling Ducted with ERV	8	LLA/C-E 8C ERV	39.6	11.38	37.6	9.5	37.85”W x 9.75”H	12.94		
Ceiling Ducted without ERV	8	LLA/C-E 8C	39.6	11.38	37.6	9.5	37.85”W x 9.75”H	11.13		
Ceiling Suspended with ERV	8	LLA/C-E 8CS ERV	39.6	11.38	37.6	9.5	37.85”W x 9.75”H	12.94		
Ceiling Suspended without ERV	7	LLA/C-E 7CS	39.6	11.38	37.6	9.5	37.85”W x 9.75”H	16.75		

FINISH:

- **VENT FRAME**: Extruded aluminum to be 6063 - T5 Alloy, Minimum .125” thick
- **BLADES**: Ext. alum 6063-T5, Min .063” thick, 1”D set at 30° angle, 1.25” on center
- **FLANGE**: 1” Sheet Metal Flange
- **REAR PLATE**: 28 ga. galv. steel w/divider between round collars
- **SCREENS**: Aluminum Hexagon (0.032 ga. 0.25" Holes on 0.28" Staggered Centers, 79% Open Area)
- **UL RATING**: NONE

SUNVENT INDUSTRIES
div of SYLRO SALES CORP.
1 Industrial Drive, #26
Pelham NH, 03076
Ph: 603-595-4556
info@sunventindustries.com

Project:	**Contractor**:
Location:	**Agent**:
Architect:	**Date**: