SUNVENT LLA LOUVERS

MODEL “LLA/C-V” with 4” deep frame, concealed 1” Flange and 2 Connections

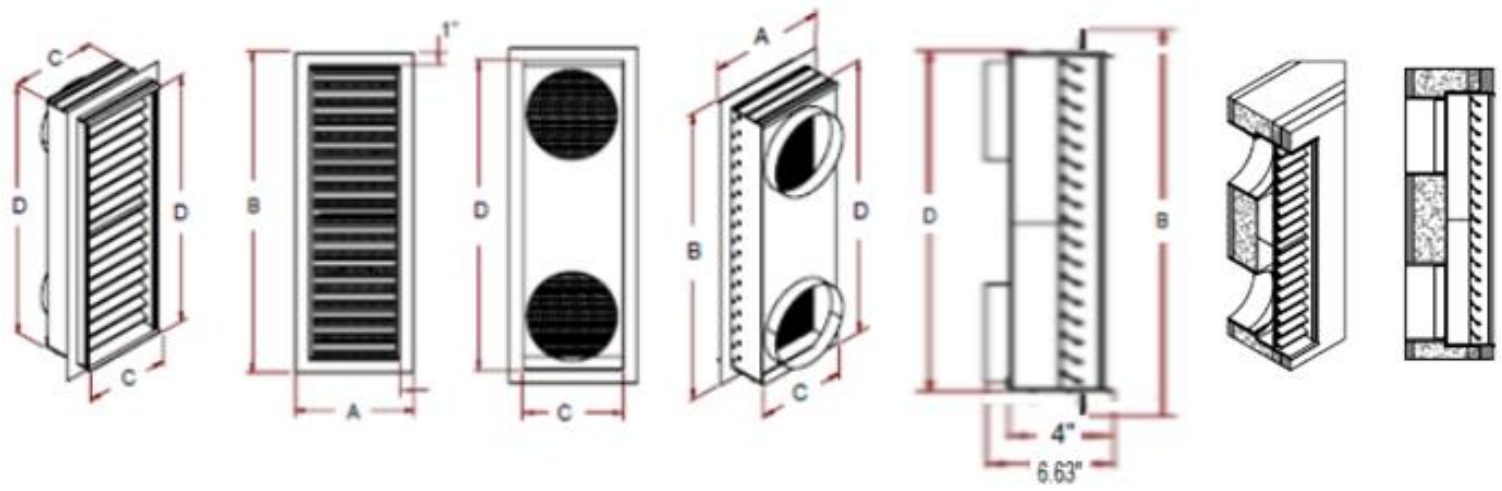

* Placement from front face

AIO Model	Collar	LLA Model	A	B	C	D	Opening Required	Centers	Qty	Flange*
Floor Standing	7	LLA/C-V 7V	10.5	23.76	8.5	21.88	8.75”W x 22.13”H	11.53		
Wall	7	LLA/C-V 7W	10.5	23.76	8.5	21.88	8.75”W x 22.13”H	13		
Wall Pro	8	LLA/C-V 8W	11.5	24.76	9.5	22.88	9.75”W x 23.13”H	13		
Vertical Stack	8	LLA/C-V 8V	11.5	33.88	9.5	32	9.75”W x 32.25”H	18.94		
Ceiling	8	LLA/C-V 8C	11.5	25.88	9.5	24	9.75”W x 24.25”H	13.89		

FINISH:

- **VENT FRAME**: Extruded aluminum to be 6063 - T5 Alloy, Minimum .125” thick
- **BLADES**: Ext. alum 6063-T5, Min .063” thick, 1”D set at 30° angle, 1.25” on center
- **FLANGE**: 1” Sheet Metal Flange
- **REAR PLATE**: 28 ga. galv. steel w/divider between round collars
- **SCREENS**: Aluminum Hexagon (0.032 ga. 0.25" Holes on 0.28" Staggered Centers, 79% Open Area)
- **UL RATING**: NONE

SUNVENT INDUSTRIES
div of SYLRO SALES CORP.
1 Industrial Drive, #26
Pelham NH, 03076
Ph: 603-595-4556
info@sunventindustries.com

Project:	**Contractor**:
Location:	**Agent**:
Architect:	**Date**: