
SUNVENT LLA LOUVERS

MODEL “LLA/F-V” with Transition Box” Vent with 1” Front Flange and 2 Connections

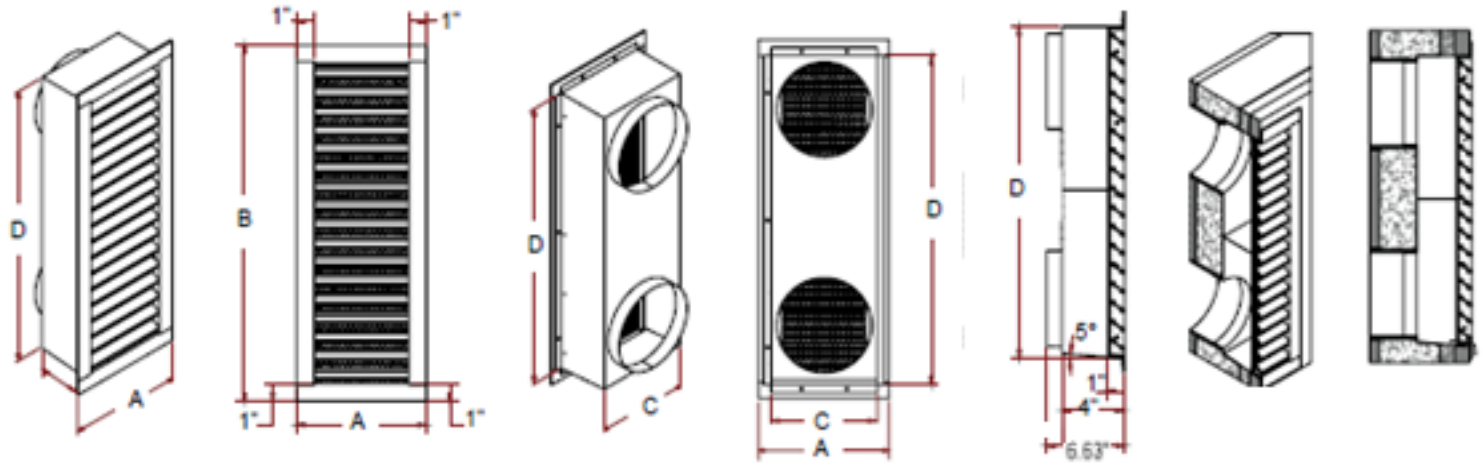

AIO Model	Collar	LLA Model	A	B	C	D	Opening Required	Centers	Qty
Floor Standing	7	LLA/F-V 7V	9.63	22.63	8.13	20.88	8.38”W x 21.13”H	11.53	
Wall	7	LLA/F-V 7W	9.63	22.63	8.13	20.88	8.38”W x 21.13”H	13	
Wall Pro	8	LLA/F-V 8W	10.63	23.63	9.13	21.88	9.38”W x 22.13”H	13	
Vertical Stack	8	LLA/F-V 8V	10.63	33.30	9.13	31.55	9.38”W x 31.75”H	18.94	
Ceiling	8	LLA/F-V 8C	10.63	24.89	9.13	23.14	9.38”W x 23.39”H	13.89	

FINISH:

- **VENT FRAME**: Extruded aluminum to be 6063 - T5 Alloy, Minimum .125” thick, with 1” Front Flange
- **BLADES**: Extruded aluminum to be 6063-T5, Min .063” thick, 1”D set at 30° angle, 1.25” on center
- **BOX**: 28 ga. galv. steel w/divider between round collars, with 5° slope from back to front with 0.5” bend at bottom.
- **SCREENS**: Aluminum Hexagon (.032 ga. .25" Holes on .28" Staggered Centers, 79 % Open Area)
- **UL RATING**: None

SUNVENT INDUSTRIES
div of SYLRO SALES CORP.
1 Industrial Drive, #26
Pelham NH, 03076
Ph: 603-595-4556
info@sunventindustries.com

Project:	**Contractor**:
Location:	**Agent**:
Architect:	**Date**: